




HARDWARE

CHAIN HOOKS


CLEVIS GRAB HOOK

| SIZE OF CHAIN (INCHES) | RATED LOAD (LBS.) | | | APPROXIMATE DIMENSIONS (INCHES) | | | | WEIGHT POUNDS EACH |
|------------------------|-------------------|-----------|-----------|---------------------------------|-------|-------|-------|--------------------|
| | HIGH TEST | TRANSPORT | LOW ALLOY | C | E | F | G | |
| 1/4 | 2600 | 3150 | 3600 | 1-13/16 | 7/16 | 3/8 | 11/32 | 0.36 |
| 5/16 | 3900 | 4700 | 5400 | 2-5/32 | 1/2 | 7/16 | 7/16 | 0.60 |
| 3/8 | 5400 | 6600 | 7500 | 2-15/32 | 19/32 | 15/32 | 1/2 | 1.00 |
| 7/16 | 7200 | 8750 | 10000 | 2-25/32 | 21/32 | 9/16 | 9/16 | 1.31 |
| 1/2 | 9200 | 11300 | 12750 | 3-7/32 | 3/4 | 5/8 | 21/32 | 2.06 |
| 5/8 | 12750 | 16500 | 19000 | 4-3/32 | 29/32 | 3/4 | 25/32 | 4.25 |
| 3/4 | 18500 | | 27000 | 4-5/8 | 15/16 | 7/8 | 15/16 | 7.19 |

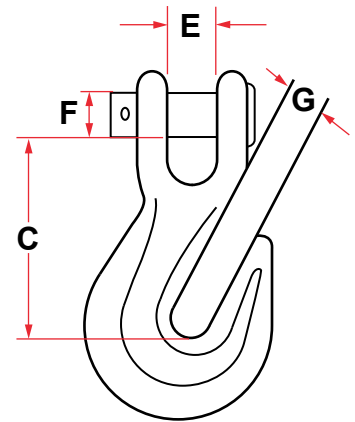

CLEVIS SLIP HOOK

| SIZE OF CHAIN (INCHES) | RATED LOAD (LBS.) | | | APPROXIMATE DIMENSIONS (INCHES) | | | | WEIGHT POUNDS EACH |
|------------------------|-------------------|-----------|-----------|---------------------------------|--------|-------|---------|--------------------|
| | HIGH TEST | TRANSPORT | LOW ALLOY | C | E | F | G | |
| 1/4 | 2600 | 3150 | 3250 | 2-9/16 | 7/16 | 3/8 | 15/16 | 0.44 |
| 5/16 | 3900 | 4700 | 5000 | 2-23/32 | 13/32 | 7/16 | 1-1/16 | 0.75 |
| 3/8 | 5400 | 6000 | 6600 | 3-1/4 | 19/32 | 15/32 | 1-5/16 | 1.13 |
| 7/16 | 7200 | 8700 | 8750 | 3-21/32 | 9/16 | 9/16 | 1-9/16 | 2.06 |
| 1/2 | 9200 | 11000 | 11300 | 4 | 3/4 | 5/8 | 1-11/16 | 2.75 |
| 5/8 | 11500 | 16000 | 16500 | 4-15/16 | 13/16 | 3/4 | 2 | 4.75 |
| 3/4 | | | 19250 | 6-3/32 | 1-5/16 | 1 | 2-1/2 | 11.28 |

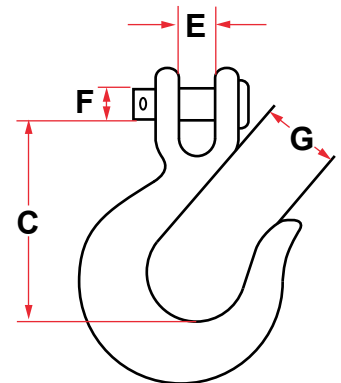

HARDWARE

RATED LOAD SHOULD NOT BE EXCEEDED