




HARDWARE

CHAIN HOOKS


EYE GRAB HOOK

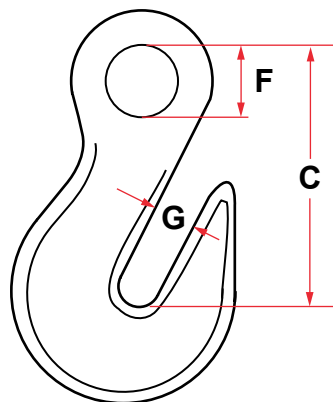

SIZE OF CHAIN (INCHES)	RATED LOAD (LBS.)			APPROXIMATE DIMENSIONS (INCHES)			WEIGHT POUNDS EACH
	LOW CARBON	HIGH TEST	LOW ALLOY	C	F	G	
1/4	1250	2600	3250	1-31/32	1/2	11/32	0.28
5/16	1900	3900	5000	2-1/4	9/16	7/16	0.45
3/8	2650	5400	6600	2-9/16	21/32	1/2	0.79
7/16	3500	7200	8750	2-15/16	3/4	9/16	1.19
1/2	4500	9200	11250	3-3/8	7/8	21/32	1.75
5/8	6900	11500	16500	4-3/32	1-1/16	25/32	3.25
3/4		18500	27000	5-5/32	1-3/8	15/16	5.94
7/8		24000	35000	5-29/32	1-9/16	1-1/16	9.17
1		30000	45000	6-23/32	1-13/16	1-3/16	13.83

HARDWARE

EYE SLIP HOOK

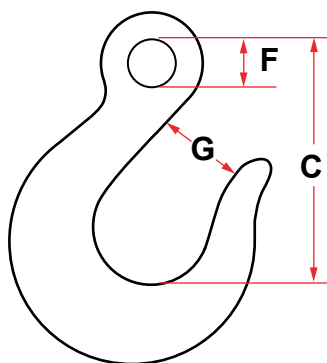

SIZE OF CHAIN (INCHES)	RATED LOAD (LBS.)			APPROXIMATE DIMENSIONS (INCHES)			WEIGHT POUNDS EACH
	LOW CARBON	HIGH TEST	LOW ALLOY	C	F	G	
1/4	1250	2600	3250	2-17/32	1/2	15/16	0.40
5/16	1900	3900	5000	2-29/32	5/8	1-1/16	0.70
3/8	2650	5400	6600	3-5/16	23/32	1-5/16	1.00
7/16	3500	7200	8750	3-7/8	13/16	1-9/16	1.56
1/2	4500	9000	11250	4-9/32	15/16	1-11/16	2.31
5/8	6900	10000	15000	5-7/32	1-1/8	2	3.78
3/4		12500	19250	5-25/32	1-3/8	2-1/8	6.56
7/8		17250	26000	7-5/32	1-9/16	2-3/4	10.42
1		22700	34000	8-3/32	1-13/16	3	14.33

RATED LOAD SHOULD NOT BE EXCEEDED

130

HOUSTON (713) 644-1183 FAX (713) 644-1185 TOLL FREE 1 (800) 233-8014 EMAIL Sales@AnchorMarineHouston.com

WWW.ANCHORMARINEHOUSTON.COM




Anchor
MARINE & INDUSTRIAL SUPPLY, INC.



CHAIN HOOKS


CLEVIS GRAB HOOK

SIZE OF CHAIN (INCHES)	RATED LOAD (LBS.)			APPROXIMATE DIMENSIONS (INCHES)				WEIGHT POUNDS EACH
	HIGH TEST	TRANSPORT	LOW ALLOY	C	E	F	G	
1/4	2600	3150	3600	1-13/16	7/16	3/8	11/32	0.36
5/16	3900	4700	5400	2-5/32	1/2	7/16	7/16	0.60
3/8	5400	6600	7500	2-15/32	19/32	15/32	1/2	1.00
7/16	7200	8750	10000	2-25/32	21/32	9/16	9/16	1.31
1/2	9200	11300	12750	3-7/32	3/4	5/8	21/32	2.06
5/8	12750	16500	19000	4-3/32	29/32	3/4	25/32	4.25
3/4	18500		27000	4-5/8	15/16	7/8	15/16	7.19

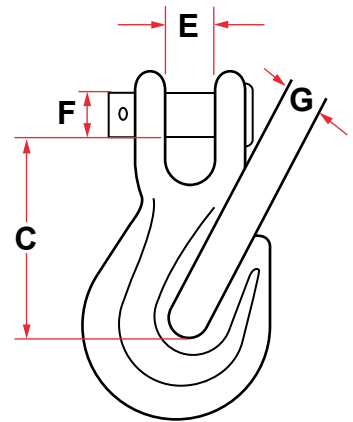

CLEVIS SLIP HOOK

SIZE OF CHAIN (INCHES)	RATED LOAD (LBS.)			APPROXIMATE DIMENSIONS (INCHES)				WEIGHT POUNDS EACH
	HIGH TEST	TRANSPORT	LOW ALLOY	C	E	F	G	
1/4	2600	3150	3250	2-9/16	7/16	3/8	15/16	0.44
5/16	3900	4700	5000	2-23/32	13/32	7/16	1-1/16	0.75
3/8	5400	6000	6600	3-1/4	19/32	15/32	1-5/16	1.13
7/16	7200	8700	8750	3-21/32	9/16	9/16	1-9/16	2.06
1/2	9200	11000	11300	4	3/4	5/8	1-11/16	2.75
5/8	11500	16000	16500	4-15/16	13/16	3/4	2	4.75
3/4			19250	6-3/32	1-5/16	1	2-1/2	11.28

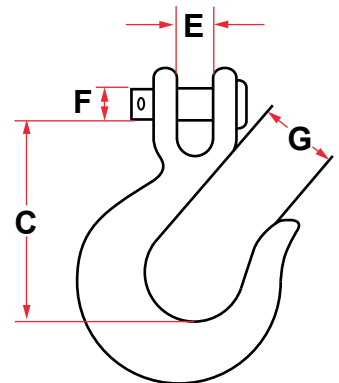

HARDWARE

RATED LOAD SHOULD NOT BE EXCEEDED